

## V-MOVE S

---



# V-MOVE S

## Compact yet powerful

This compact electric tow tug is a true powerhouse in a small package. With its modest size and a towing capacity of 1,300 kg, it's ideal for moving roll containers, trolleys and other wheeled carts. It's powerful, yet silent: the perfect fit for work areas where it's already noisy enough.

## Flexible and reliable

The V-move S is fitted with two powerful electric motors and an adjustable coupling, with an optional hydraulic coupling available. This guarantees maximum flexibility, whatever the load. And thanks to its low-maintenance lithium battery, the V-move S lets you get the job done with peace of mind and without interruption.

## Maximum performance, minimal effort

Looking for a compact, efficient and quiet workhorse? The V-move S is your answer. Whether used in a warehouse, factory, or distribution centre, it delivers maximum performance with minimal effort. It moves heavy loads with ease, making your working day that much lighter.


## Developed and manufactured in Leiden

Developed and manufactured entirely in-house at Verhagen Leiden, our V-move S delivers top-notch Dutch quality you can depend on. Are you ready to embrace the power without the noise?






**The V-move S is fully developed and produced by V-move in the Netherlands.**

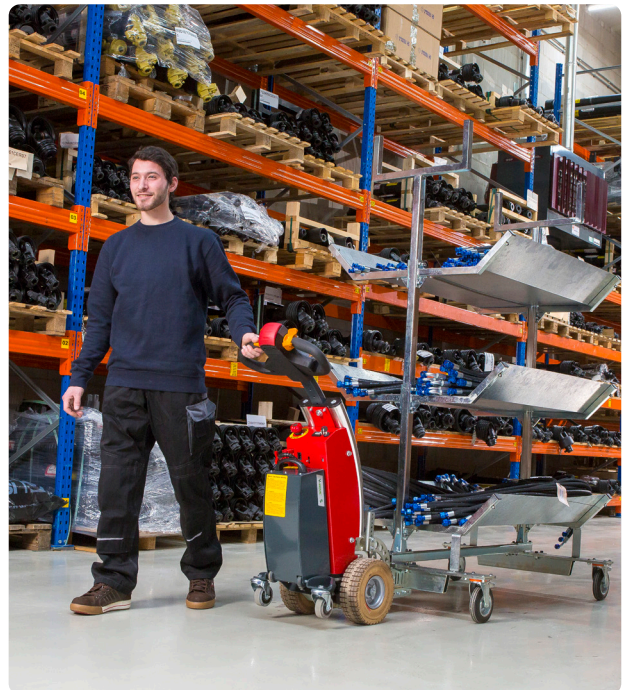


## V-MOVE S / Couplings

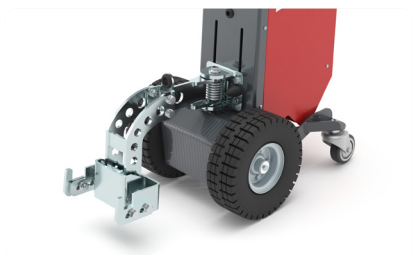


**VMON11152**

Standard coupling

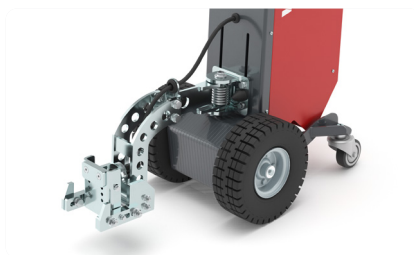


**VMON11156**

Hydraulic coupling model 1

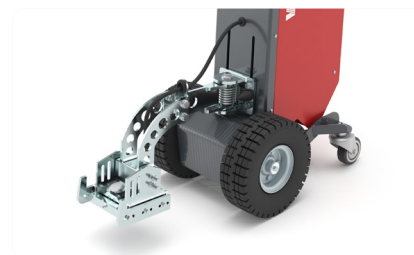

**VMON11159**

Hydraulic coupling model 2

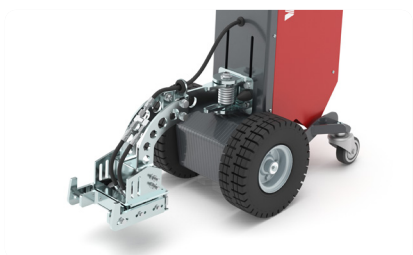

**VMON08716**

Hydraulic Danish trolley coupling

## V-MOVE S / Technical specifications

S	
Maximum towing capacity	1,300 kg (≈ 2,866 lbs)
Maximum tractive force	1,100 N
Voltage	24 V
Drive system	Dual drive
Motor	2 × 300 W DC
Brake system	Regenerative
Parking brake	Electromagnetic
Horn	Yes
Battery indicator	Yes
Forward speed	5 km/h (≈ 3.1 mph)
Reverse speed	5 km/h (≈ 3.1 mph)
Standard drive wheels	Solid rubber
Steering wheel	x
Machine weight including battery	80 kg incl. batteries (≈ 176 lbs)
Maximum permissible counterweight	x
Standard battery	24 V 36 Ah lithium iron phosphate
Battery charger	Internal 230 V 11 A

V-MOVE S / Dimensions (mm)



